

COURTESY COPY

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

ATTORNEYS AT LAW

CORRESPONDENCE TO:
P.O. BOX 1404
ALEXANDRIA, VIRGINIA 22313-1404
TELEPHONE: (703) 836-6650
GROUP 3 FAX: (703) 836-2021
GROUP 4 FAX: (703) 836-0028

OFFICE ADDRESS
GEORGE MASON BUILDING
699 PRINCE STREET
ALEXANDRIA, VIRGINIA 22314-3187

JAMES P. BURNS (1896-1982)
VERNON H. DOANE (1909-1968)
J. PRESTON SWECKER (1904-1996)

PETER H. SMOGLIA
ROY H. MASSENGILL
OF COUNSEL

CHARLES T. DYNER
BRIAN R. OSHAGHNESSY
COUNSEL

WILLIAM J. MATHIS
ROBERT S. SWECKER
PLATON W. MANDROS
BENTON S. SUFFETT, JR.
JOSEPH P. MAGNONE
NORMAN H. STERNO
RONALD L. GORDON
FREDERICK C. MICHAUD, JR.
ALAN E. KOPECKI
REGIS E. SLUTTER
SAMUEL C. MILLER III
RALPH L. FREELAND, JR.
ROBERT G. WUKA
GEORGE A. NOVANEK, JR.
JAMES A. LABARRE
E. JOSEPH GESS
R. DANNY HUNTINGTON
ERIC H. WEISBLATT
JAMES W. PETERSONT
TERESA STANKEK REA
ROBERT E. KREIST
ADRIENNE L. WHITE
ROBERT M. SCHULMAN
WILLIAM C. ROWLAND
T. GENE DILLAHUNTY
ANTHONY W. SHAW

PATRICK C. KEANE
B. JEFFERSON ROGGS, JR.
WILLIAM H. BENET
PETER K. SKIFF
RICHARD J. MCCRATH
MATTHEW L. SCHNEIDER
MICHAEL O. SANKING
GERALD F. SWIST
DAVID M. SCHLITZ
ROBERT DEVOS
B. PARKER LIVINGSTON, JR.
BASSAM W. IBRAHIM
RONNIE S. ILLIONS
STEVEN S. PAYNE
MICHAEL J. URET
CHARLES F. WIELAND III
BRUCE F. WIEDER
TODD R. WALTERS
HAROLD R. BROWN III
KENNETH B. LEFFLER
MARTIN BARRELL
LESLIE A. NOGOT
DONNA M. NEUTH
ALLEN R. BAUM
STEVEN M. JURDIS
EARL A. BRIGHT III

CHARLES H. JEWIT
ROBERT JONES MORRALL
ROBIN L. TESLIN
RICHARD C. EASTROM
THOMAS M. BLASEY
BRADLEY J. OLSON
FRED W. HATHAWAY
ALLAN M. SOOBERG
TYLER MADOFF
JONATHAN D. BASKIN
NHAT D. PHAN
JOHN E. CURTIN
MARK R. KRESLOFF
MATTHEW P. BLISCHAK
LESLIE J. BOLEY
JEFFREY A. PADE
HOLLY M. FORD
BARBARA W. WALKER
MICHAEL A. WERNY
JEFFREY A. HAGENAH
ROBERT S. BABAY

SAN FRANCISCO, CA AREA OFFICE
BUILDING 4 - SUITE 160
3000 SAND HILL ROAD
MENLO PARK, CALIFORNIA 94025-7116
TELEPHONE: (415) 854-7400
FAX: (415) 854-5275

RESEARCH TRIANGLE, NC AREA OFFICE
1099 SLATER ROAD, SUITE 210
DURHAM, NORTH CAROLINA 27703
TELEPHONE: (919) 941-9240
FAX: (919) 941-1515

M. KATHERINE BAUMEISTER
SUSAN E. HEMINGER
PATENT AGENT

† CALIFORNIA BAR
○ NORTH CAROLINA BAR
* BARS OTHER THAN VA, CA & NC

December 26, 1996

Honorable Commissioner of
Patents and Trademarks
Washington, D.C. 20231

Re: Application for Reissue of
U.S. Patent No. 5,377,183
Our Reference: 027540-688

Sir:

Transmitted herewith for filing is the reissue patent application of Paul W. Dent, for
"CALLING CHANNEL IN CDMA COMMUNICATIONS SYSTEM".

The application comprises a copy of the original Letters Patent No. 5,377,183 and new
claims 29-36.

It is respectfully requested that this application be granted a serial number and filing
date pursuant to 37 C.F.R. § 1.53. The requisite DECLARATION, OFFER TO SURRENDER,
ASSENT OF ASSIGNEE AND POWER OF ATTORNEY will follow.

A check in the amount of \$1,362.00 (including \$240.00 for three excess independent
claims) is enclosed to cover the filing fee. An order for a title report is also enclosed.

Please transfer the drawings of the original Letters Patent to this application. An
informal copy of the drawings is submitted herewith as part of the application.

NUTSHELL
1-6-97

12/26/96
88

Honorable Commissioner of Patents
and Trademarks
December 26, 1996
Page 2


The Commissioner is hereby authorized to charge payment of the following fees or credit any overpayment to Deposit Account No. 02-4800:

- (a) Any additional filing fees required under 37 C.F.R. § 1.16;
- (b) Any patent application processing fees required under 37 C.F.R. § 1.16 for presentation of extra claims.

A duplicate of this letter is enclosed.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

By: 
Steven M. du Bois
Registration No. 35,023

SMD:dmw
Enclosures

29. A method for transmitting control information and user traffic signals from a first base station to a plurality of mobile stations in a code division multiple access communication system comprising the steps of:

coding control information using a spread spectrum code unique to control information to form a calling channel signal.

wherein said control information carries information for a specified group of mobile stations only at predetermined times;

coding each user traffic signal using a spread spectrum code unique to each traffic signal;

adding said calling channel signal and said coded traffic signal to obtain a composite signal;

modulating said composite signal on a radio frequency carrier to form a radio frequency signal;

transmitting said radio frequency signal to said plurality of said mobile stations;

receiving said radio frequency signal at at least one of said mobile stations;

decoding said received signal in said mobile station to extract said control information; and

decoding said radio frequency signal in said mobile station to extract traffic information intended for said mobile station.

30. A method for paging a mobile station in a code division multiple access communication system comprising the steps of:

assigning said mobile station to a subgroup of data blocks to be transmitted on a calling channel;

encoding said subgroup of data blocks using a spread spectrum code assigned to said calling channel; and

transmitting a paging message to said mobile station in only said subgroup.

31. The method of claim 30, wherein a duration of each of said data blocks is equal to a duration of a speech coder's analysis period.

32. The method of claim 30, wherein said step of assigning further comprises the step of:

using a mobile identification code associated with said mobile station to determine said assigned subgroup.

33. A code division multiple access communication system for transmitting control information and user traffic signals from a first base station to a plurality of mobile stations comprising:

means for coding control information using a spread spectrum code unique to control information to form a calling channel signal.

wherein said control information means carries information for a specified group of mobile stations only at predetermined times;

means for coding each user traffic signal using a spread spectrum code unique to each traffic signal;

means for adding said calling channel signal and said coded traffic signal to obtain a composite signal;

means for modulating said composite signal on a radio frequency carrier to form a radio frequency signal;

means for transmitting said radio frequency signal to said plurality of said mobile stations;

means for receiving said radio frequency signal at at least one of said mobile stations;

means for decoding said received signal in said mobile station to extract said control information; and

means for decoding said radio frequency signal in said mobile station to extract traffic information intended for said mobile station.

34. A code division multiple access communication system for paging a mobile station comprising:

means for assigning said mobile station to a subgroup of data blocks to be transmitted on a calling channel;

means for encoding said subgroup of data blocks using a spread spectrum code

assigned to said calling channel; and

means for transmitting a paging message to said mobile station in only said subgroup.

35. The system of claim 34, wherein a duration of each of said data blocks is equal to a duration of a speech coder's analysis period.

36. The system of claim 34, wherein said means for assigning further comprises means for using a mobile identification code associated with said mobile station to determine said assigned subgroup.

CALLING CHANNEL IN CDMA
COMMUNICATIONS SYSTEM

This application is a continuation of application Ser. 5
No. 07/868,355, filed Apr. 13, 1992, now abandoned.

FIELD OF THE INVENTION

The invention relates to the use of Code Division
Multiple Access (CDMA) modulation in a mobile tele- 10
phone system to permit several conversations to take
place simultaneously in the same frequency channel.
The fixed network side of the mobile telephone system
is divided into cells to provide area coverage. A base
station illuminates each cell with CDMA radio signals 15
that carry a number of different conversations overlap-
ping in the same frequency channel. The power in each
overlapping signal is graded according to the distance
from the mobile it is serving. The strongest of the over-
lapping signals is reserved and used as a broadcast chan- 20
nel to all mobiles, known as the calling channel, for that
cell. The calling channel is used to inform presently
silent mobiles if they are being called. In addition, the
calling channel also carries information about the status
of the cell and immediate neighboring cells. The calling 25
channel's CDMA signal according to the present inven-
tion has a fixed phase relationship with the traffic sig-
nals that may be used by mobiles in conversation to
facilitate decoding of their signals.

BACKGROUND OF THE INVENTION 30

The cellular telephone industry has made phenome-
nal strides in commercial operations in the United States
as well as the rest of the world. Growth in major metro-
politan areas has far exceeded expectations and is out- 35
stripping system capacity. If this trend continues, the
effect of rapid growth will soon reach even the smaller
markets. Innovative solutions are required to meet these
increasing capacity needs as well as to maintain high
quality service and to avoid rising prices. 40

Throughout the world, one important step in cellular
systems is to change from analog to digital transmission.
Equally important is the choice of an effective digital
transmission scheme for implementing the next genera- 45
tion of cellular technology. Furthermore, it is widely
believed that the first generation of personal commu-
nication networks (PCN), (employing low cost, pocket-
size, cordless telephones that can be carried comfort-
ably and used to make or receive call in the home, of- 50
fice, street, car, etc.), will be provided by the cellular
carriers using the next generation digital cellular system
infrastructure and the cellular frequencies.

A key feature demanded in these new system is in-
creased traffic capacity. Currently, cellular mobile tele-
phone systems divide a region to be covered into cells. 55
The modulation system used in current cellular radio
systems is called Frequency Division Multiple Access
(FDMA), in which each cell is allocated a set of fre-
quencies which are different from the frequencies used
in neighboring cells. Each frequency in the FDMA 60
system only carries one conversation, and therefore the
reuse of a frequency in another cell is only permitted
when it is a sufficient distance away from the first cell so
that interference does not occur. In FDMA cellular
systems, one frequency per cell is dedicated to be a 65
so-called calling channel. The frequency of the calling
channel the frequency a mobile monitors when the
mobile station is in an idle condition, and is used by the

network to call mobiles when a conversation is originated by the network. A corresponding uplink frequency (mobile to base) is available for use by the mobile to originate calls. The FDMA calling channel also carries information about neighboring cells' calling channel frequencies and also identifies the cell in the network.

In the United States and Europe, time division multiple access (TDMA) is about to be introduced for the provision of cellular mobile telephone services. In the United States' system, the FDMA calling channel is retained as the method by which calls are initiated. In the European GSM system, the TDMA format provides eight time slots on each 200 kHz-wide frequency channel. One of these eight time slots on one of the frequency channels of each cell is designated as a calling channel. The information carried on the TDMA calling channel includes TDMA synchronization information, details about surrounding cells and calls to specific mobiles.

SUMMARY OF THE INVENTION

The present invention relates to the provision of a calling channel in a CDMA system. The CDMA system differs from the TDMA and FDMA systems in that several signals overlap in both the time domain and the frequency domain. According to the present invention, the calling channel is chosen to be the strongest overlapping signal so that it reaches mobiles which are located on the cells' extreme boundaries. The interference other signals experience because they overlap with the calling channel may be avoided by having the mobiles first demodulate the calling channel signal and then subtract it out before demodulating their own signals.

In contrast with the FDMA and TDMA systems, the inventive CDMA system permits mobiles to read the calling channel at the same time as decoding their own communication signals. Moreover, the calling channels for neighboring base stations can directly share the same frequency by means of a different spreading code, so that a mobile can also detect the strength of neighboring base stations and read their calling channels without changing frequency. In FDMA systems, a mobile cannot receive a signal from a neighboring base station at the same time it is receiving traffic signals. In TDMA systems, this can only be done by the mobile changing frequency during idle time slots, which requires a fast switching synthesizer. The inventive CDMA system permits mobiles to detect the calling channels of its own base station and surrounding base stations even during a conversation, without needing to change frequencies.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail with reference to preferred embodiments of the invention, given only by way of example, and illustrated in the accompanying drawings, in which:

FIG. 1 illustrates a portion of a cellular mobile radio system having cells, a mobile switching center, base stations and mobile stations;

FIG. 2 illustrates the general arrangement of one implementation of a base station transmitting apparatus according to the present invention;

FIG. 3 illustrates the combination of several signals at a base station;

FIG. 4 illustrates a block diagram of digital signal generation;

FIG. 5 illustrates a block diagram of the general arrangement of a receiver in a mobile station according to the present invention;

FIG. 6 illustrates a block diagram of a preferred embodiment of a base station; and

FIG. 7 illustrates a block diagram of a preferred embodiment of a receiver in a mobile station.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

While the following description is in the context of a cellular communication systems involving portable or mobile radio telephones and/or personal communication networks, it will be understood by those skilled in the art that the present invention may be applied to other communication applications.

FIG. 1 illustrates ten cells C1-C10, in a cellular mobile radio system. Normally a cellular mobile radio system according to the present invention would be implemented with more than ten cells. However, for the purposes of simplicity, the present invention can be explained using the simplified representation illustrated in FIG. 1. For each cell, C1-C10, there is a base station B1-B10 with the same reference number as the corresponding cell. FIG. 1 illustrates the base stations as situated in the vicinity of the cell's center and having omnidirectional antennas. The cells C1-C10 are, therefore, schematically represented as hexagons. The base stations of adjacent cells may, however, be co-located in the vicinity of cell borders and have directional antennas as is well known to those skilled in the art.

FIG. 1 also illustrates nine mobile stations M1-M9, moveable within a cell and from one cell to another. In a typical cellular radio system, there would normally be more than nine cellular mobile stations. In fact, there are typically many times the number of mobile stations as there are base stations. However, for the purpose of explaining the invention, the reduced number of mobile stations is sufficient.

Also illustrated in FIG. 1 is a mobile switching center MSC. The mobile switching center MSC illustrated in FIG. 1 is connected to all ten base stations B1-B10 by cables. The mobile switching center MSC is also connected by cables to a fixed public switching telephone network or similar fixed network. All cables from the mobile switching center MSC to the base stations B1-B10 and cables to the fixed network are not illustrated.

In addition to the mobile switching center MSC illustrated, there may be another mobile switching center connected by cables to base stations other than those illustrated in FIG. 1. Instead of cables, other means, for example, fixed radio links may be used for connecting base stations B1-B10 to the mobile switching center MSC. The mobile switching center MSC, the base stations B1-B10 and the mobile stations M1-M9 are all computer controlled.

FIG. 2 illustrates the general arrangement of one implementation of a base station which contains transmitting apparatus according to the present invention. A modulation generator 21 accepts digital data which is to be transmitted on a calling channel. The modulation generator 21 uses a combination of error correction and spread spectrum coding to give the signal a higher bit rate stream for transmission. The modulation generator 21 then converts the signal to I, Q waveforms that are applied through low-pass filters 23 to balanced modulators 24 along with sine and cosine carrier signals at an appropriate intermediate frequency. A symbol at the

higher, spread spectrum bit rate, is called a chip. Chips can be modulated onto a radio frequency carrier using an appropriate and well known modulation technique. Various modulation techniques are well-known and include quadrature phase shift keying, offset quadrature phase shift keying, quadrature amplitude modulation and offset quadrature amplitude modulation. For example, even chips can be applied to an I channel and odd chips can be applied to a Q channel to create QPSK modulation. If chip timing is offset by one chip period between the I and Q channels, offset QPSK is created.

Each traffic channel has a similar I,Q modulation generator 22 driven by traffic data bits. The modulated sine and cosine waves are added in summing network 25. The signal from the calling channel summing network 25 is applied directly to the input of an overall summing network 27 while each traffic signal is first reduced by a factor of A1, A2, A3 . . . in attenuators or variable gain devices 26 before being applied to the overall summing network 27. The sum of the calling channel and the weighted traffic signal from summing network 27 are then up-converted in mixer 28 using a suitable local oscillator frequency from a frequency synthesizer 29 and amplified up to a desired transmit power level in a linear amplifier 30.

Each frequency used in the cell has a similar arrangement. It is possible that the composite signals from two or more mixers 38 that are up-converted to different frequencies can be summed in a further summing network 31 and applied to a common transmit power amplifier 32 as illustrated in FIG. 3. The outputs from several power amplifiers 32 which have sufficiently separated frequencies can be further combined in a multicoupler unit 33 and sent to a common antenna 34. As a result, the addition of still further cell capacity would need a number of separate antennas.

FIG. 4 illustrates an alternative implementation of the present invention that performs weighting of the signals digitally before D to A conversion and application to a common I,Q modulator. A digital signal processing unit 40 accepts a number of traffic data streams in addition to a calling channel data stream and numerically generates waveform samples corresponding to the desired I,Q modulation. Each traffic signal I,Q waveform sample is then weighted by multiplying the sample with a desired factor for that signal before being added to the calling channel I,Q samples. The sum is then outputted from the digital signal processing unit to an "I" D to A converter 41 and a "Q" D to A converter 41. The output signals from the D to A converters 41 are low-pass filtered in filter 42 to interpolate the signal between the samples, reconstructing continuous waveforms to drive the sine/cosine modulator 43. The outputs from the sine/cosine modulators 43 are then summed in summing network 44 and then up-converted in mixer 45 to the selected transmission frequency. A linear transmitter power amplifier 46 raises the power level to the desired level for transmission.

In the present invention, the levels of each traffic signal in the composite sum-signal are independently controlled by adjusting the weighting factors A1, A2, A3 . . . which are set according to the distance between the mobile station and the base station. More specifically, a preferred implementation of the present invention employs a duplex power control system in which the base station increases the power transmitted to a mobile if the signal received by the base station is too weak, and reduces the weighting factor in order to

reduce the power transmitted to the mobile if the signal from the mobile station is too strong. A duplex power control system is disclosed in "Duplex Power Control", U.S. patent application Ser. No. 07/866,554, filed Apr. 10, 1992, and is incorporated herein by reference.

The mobile receiver block diagram for use in the present invention is illustrated in FIG. 5. A receiver 50 amplifies, filters and down-converts a received signal received on a selected frequency channel before A to D converting its complex vector components. The digitized complex vector components are applied to a bank of correlators 51 along with signals produced by a local code generator 52 corresponding to the traffic channel code and calling channel codes of its own and surrounding base stations. The correlators 51 extract the underlying information modulated on each CDMA signal and transfer the information from detected calling channels to a control processor 53. The control processor 53 can include means such as an error correction decoder to reduce the incidence of bit errors caused by noise. Traffic data extracted by the correlator 51 for the traffic channel can be used in for example, a digital speech decoder.

The data from detected calling channels, along with signal strength information about each signal is used by the control processor 53 to ascertain the codes of other surrounding base stations, and to program the code generator to search for new base stations when appropriate. The control processor can also determine whether the base station currently in use is the best base station or whether a stronger base station is available. In this case, a handover to the strongest base station as indicated by the relative signal strength of its calling channel signal can be requested. In addition, the mobile station can report the measured signal strengths to its base stations, whereafter the communication system can determine which base station to use to transmit traffic to the mobile station.

In another embodiment of the present invention, the calling channels of all base stations use the same CDMA codes and are synchronous. Because of different distances between different base stations and a selected mobile station, the signals might not be synchronous at the mobile but rather delayed by one or more chips. In this case, the composite signal appears to the mobile as being a single signal with a delayed echo. A RAKE receiver may then be employed to decode the composite signal. A suitable RAKE receiver is described in U.S. Pat. No. 5,237,586, filed on Mar. 25, 1992, for "RAKE Receiver with Selective Ray Combining", 50 which is expressly incorporated here by reference.

In the preferred embodiment of the present invention, the calling channel signal from a base station has a fixed phase relationship with the traffic signal for a mobile station. The phase of the traffic channel signals relative to the calling channel is thus deliberately fixed at either 0, 90, 180 or 270 degrees. The preferred relative phase between traffic and calling channels, wherein the traffic signals are put in an ordered list according to their signal strength, alternates between 0° and 90°. For example, the strongest signal is the calling channel and it is treated as the phase reference and is considered to have a phase of 0°. The traffic channel which is the next strongest channel is then set to 90°. Using QPSK modulation, this is accomplished by interchanging the I and Q signals produced by the modulation generator. The traffic channel which has the third strongest signal is then set to 0° again and so on. The purpose of this pre-

ferred arrangement is to reduce mutual interference between signals.

The fixed phase relationship may be exploited by the mobile to improve decoding of the mobile's traffic signal. Since the calling channel has the strongest signal strength, it is decoded first by the mobile and its phase can be determined. The phase may then be used as a coherent reference for demodulating the traffic signal. More particularly, a RAKE receiver can decode signals that suffer from delayed echoes by correlating various time shifts of the received signal with the code of the signal. Each correlation produces a complex number corresponding to the phase and amplitude of the echo of that delay. Information on the phase and amplitude of each echo found during demodulation of the calling channel may then be applied to effect coherent combination of the energy in different echoes for traffic signal demodulation.

According to another aspect of the present invention, the format of data, which is broadcast by the calling channel, has a specific format to enable idle mobiles to predict when messages addressed to them are likely to be broadcast. As a result, a mobile can enter a power saving mode at other times when reception is not needed.

The calling channel transmission has a multiplexed data format which is divided into data blocks of roughly 20 millisecond durations. The duration of data blocks is deliberately made to equal the duration of the analysis period of the digital speech encoder used for sending speech on the traffic channels. The 20 ms data blocks are further sub-multiplexed between common data broadcasts for all mobile stations and data addressed to limited subgroups of mobiles. The subgroup to which a mobile station belongs is determined by the mobile stations mobile identification code. For example, 10 subgroups could be defined by using the last decimal digit of the telephone number of the mobile station as the mobile identification code. The calling channel format would then consist of 20 ms of common data transmission, followed by 20 ms of data transmission to a mobile phone with a number ending in zero, followed by a 20 ms transmission to a phone ending in 1, and so on. As a result, the whole format repeats every 220 ms. When the network initiates a call to a mobile station, it places the message in the corresponding block. As a result, a mobile station knows that it only needs to listen for calls in its assigned 20 ms time slot out of the 220 ms cycle, and thus may enter a power saving mode for approximately 90% of the time.

In addition, the present invention, by virtue of setting the duration of the calling channel data block equal to the duration of the speech coder analysis period, has the further advantage that speech data frame synchronization is already available in the mobile station at call setup by simply monitoring the calling channel.

Another embodiment of the present invention is illustrated in FIG. 6. Data bits for each traffic signal or the calling channel are grouped into groups of seven and applied to a 128 bit orthogonal Walsh code generator 60. The Walsh code generator 60 produces a sequence of 128 output bits that are bit-wise exclusive-ORed in XOR gate 61 with a scrambling bit sequence unique to each signal. The scrambled Walsh code sequence then determines by means of sign-changer 62 whether the constant $a(i)$, being the desired amplitude of signal i , is added or subtracted from one of the accumulators 64. A switch 63 determines which accumulator the constant

$a(i)$ is added or subtracted from. In principle, for an even "I", the switch 63 is operated so that even-numbered scrambled Walsh code bits cause the constant $a(i)$ to be routed to the I accumulator while odd-numbered bits cause the constant $a(i)$ to be routed to the Q accumulator. On the other hand, the reverse applies for an odd "I". However, there is a need to modify this regular alternating order on occasions, as will be further described below, so that in practice the switch 63 is steered by a controlled bit stream which indicates whether the signal has a zero or 90° relative phase. 5

The processor accumulates the values over all signals one Walsh code word bit at a time and then the "I" and "Q" accumulator contents are outputted to a pair of digital to analog converters 65. The accumulators 64 are then cleared of the values accumulated for all signals and the next Walsh code word bits are accumulated, and so on. As a result, the D to A converters 65 receive a new value for each Walsh code bit, and a particular signal affects the I and Q values on alternate bits. The output signals from the "I" and "Q" D to A converters 65 are low-pass filtered and applied to sine/cosine modulators. 15

The preferred modulation used in this embodiment is not conventional QPSK modulation, but rather a variation thereof called impulse excited QPSK or impulse excited offset quadrature amplitude modulation (OQAM). The difference between the two forms of modulation is that a bit polarity is not represented by a constant plus or minus value, but rather by a positive or negative impulse which is used to shock excite the I or Q low-pass filter. The time during which the waveform generated for a bit effects the transmitted signal is limited to the duration of the impulse response of the low-pass filters. If the duration is several symbols long, say five bits, the waveform at any instant is due to the superimposition of five delayed impulse responses which have the polarities of the symbols in question. As a result, there are only two to the power of 5 possible waveforms over a bit interval, which corresponds to all possible polarity combinations the five symbols can take on. A preferred implementation of the present invention is to predetermine points on these waveforms for each combination and to store them in a memory. For every I or Q symbol period, one of these stored waveforms is then selected from the memory according to the five previous symbol polarities and the waveform is outputted point-by-point to the A to D converters. Typically, eight points over each symbol period might be used to generate a smooth waveform that does not need a lot of low-pass filtering after the D to A conversion. 25

The base station signal generator described above produces the sum of a calling channel code word with a weight of 1 with several traffic channel code words of progressively lower amplitude weighting and a nominally alternating phase relative to the calling channel which alternates between 0° and 90°. Because the relative amplitudes given by the constant $a(i)$ are slowly being modified by the base station master controller to adapt to varying mobile station distances, the ordered list of signal-strengths can suddenly change as two signal levels cross over. This could mean that the zero or 90 degree phase of a signal could suddenly and unexpectedly change. To prevent such an occurrence, the occasions on which the phase of a traffic signal is permitted change are limited to once per block of 42 Walsh code words per signal. At the beginning of such a block, which corresponds to a 20 ms speech coder analysis 30

frame, the desired phasing of the signal for the whole block is determined from its position. The appropriate bit is then set in the control bit stream by switch 63 to select the phase for that signal. The same phase is used for a complete block of 42 transmitted code words. The first two code words transmitted in a block of 42 Walsh code words do not carry traffic data but rather they carry control data from the mobile station. The code word transmitted on these two occasions is limited to indicating whether the base station will transmit the remaining 40 code words or not. The mobile is able to detect these special code words regardless of phase, and the mobile station can determine the phase expected for the remaining 40 code words in the block.

A preferred mobile station receiver for receiving signals produced by the above described base station signal generator is illustrated in FIG. 7. The receiver receives an input signal from an antenna, suitably filters, amplifies and down-converts it before sampling the signal and digitalizing the signals complex vector components with the aid of an A to D converter. The digitized complex samples are collected in a buffer memory 71 until the next block of 128 new samples is ready for processing. The control processor 80 provides 128 bit scrambling words for each signal that is to be demodulated in turn. The scrambling word is used to descramble the contents of the buffer memory by changing the signals of the real and imaginary parts by one or zero using a descrambler 72. A set of 128 complex samples, descrambled with the scrambling mask of a desired signal to be demodulated is passed to the fast Walsh transform computer 74. The selection and use scrambling masks is described in co-pending, commonly assigned U.S. patent application Ser. No. 07/866,865, filed on Apr. 10, 1992, for "Multiple Access Coding for Mobile Radio Communications", which is expressly incorporated here by reference.

The fast Walsh transform computer 74 calculates correlations with all possible 128 orthogonal Walsh-Hadamard code words. A suitable fast Walsh transform computer is described in U.S. patent application Ser. No. 07/735,805, filed on Jul. 25, 1991, which expressly incorporated here by reference. The fast Walsh transform computer 74 separately processes the real and imaginary parts and the complex correlations are sent to the weighting multipliers 77. All 128 complex values are multiplied by the same complex weight which is supplied from the control processor 80. The complex weight, however, is varied according to the sample shift of the buffer contents which are currently being processed.

Each signal, which is being descrambled, can be processed using one or more shifts of the samples in the buffer 71 and the weighted fast Walsh transform results are accumulated for all such shifts in accumulators 78. In order to process 128 signal samples using more than one time shift of the signal, the buffer 71 needs to keep some old samples from the previous block. For example, to process a time shift, one sampled shift requires 127 new samples and one old sample; to produce a time shift two samples shifted requires 126 new samples and two old samples, and so on.

After accumulating all shifts, the accumulator contents are processed in comparator 79 to determine the largest value. This can either be the largest magnitude or the largest algebraic value depending on the initial setup of comparator 79. The 7 bit index of the largest value is then routed to the central processor 80 and to

the blocking switches 76. The index selects one of the 128 complex signals to be replaced by zero at the input to the inverse fast Walsh transform computer 75. The complex value which is blocked from reaching the inverse fast Walsh transform computer 75 is routed instead to the control processor 80. The inverse fast Walsh transform reconstructs a new set of signal samples wherein the detected code word is removed. After rescrumbling in scrambler 73 using the same mask used in the descrambling process, the new samples are placed back in the same buffer locations. This process is carried out for all sample buffer shifts used in the accumulation process, in an order determined by the control processor. This corresponds to the forecast strength of the correlation on each shift in the order from strongest to weakest. The block values for each shift that are returned to the control processor are used by the control processor to predict the order for the next 128 sample block. These values are also used by the control processor to predict the optimums weighting coefficients to be used for the next block.

For the two special code words that can only take on one of two values, the weighting unit is signalled by the control processor 80 to operate in a slightly different manner. It can be controlled to perform accumulations corresponding to the two code words in question using either normal weights, or the weights rotated through 90° or weights that are derived from the complex conjugates of the impulse signals themselves which results in phase-independent non-coherent detection. Depending on whether the normal weights or the 90° rotated weights give the largest result, the control processor 80 decides to use the same weights for the remaining 40 code words in a traffic frame.

The above process is carried out for each signal transmitted by the base station in turn, starting with the strongest signal, the calling channel, and continuing in a descending order of predicted signal strength at least until the traffic signal of the mobile is decoded. According to one aspect of the present invention, the weighting coefficients provided by control processor 80 for traffic signal processing are derived by processing previous correlation values computed during processing of received information. Specifically, the weights of the coherent RAKE taps used for traffic decoding are obtained from the decoding of the calling channel by virtue of their deliberately arranged, and known phase relationship.

Decoding may continue for signals of lower strength in order to predict which signals are about to become larger than the desired signal. Decoding may also include signals transmitted by other neighboring base stations that, perhaps due to relative fading, are for the moment larger than the desired signal. It will be understood that the specific values of the 128 bit Walsh codes and 42 code words per traffic frame of the preferred embodiment are not meant to be limiting factors, but that any person of appropriate skill in the art can dimension systems for particular communication needs using other parameters while still being completely within the scope and intent of the present invention.

While a particular embodiment of the present invention has been described and illustrated, it should be understood that the invention is not limited thereto since modifications may be made by persons skilled in the art. The present application contemplates any and all modifications that fall within the spirit and scope of the underlying invention disclosed and claimed herein.

What is claimed is:

1. A method for transmitting control information and user traffic signals from a first base station to a plurality of mobile stations in a code division multiple access communication system comprising the steps of:
 - coding control information using a spread spectrum code unique to control information to form a calling channel signal;
 - coding each user traffic signal using a spread spectrum code unique to each traffic signal;
 - adding said calling channel signal and said coded traffic signal using predetermined weighting factors to obtain a composite signal;
 - modulating said composite signal on a radio frequency carrier to form a radio frequency signal;
 - transmitting said radio frequency signal to said plurality of said mobile stations;
 - receiving said radio frequency signal at at least one of said mobile stations;
 - decoding said received signal in said mobile station to extract said control information wherein said control information is used by said mobile station to determine if said mobile station is being called and to determine a phase of the calling channel signal;
 - and
 - decoding said radio frequency signal in said mobile station using said phase of the calling channel signal to extract traffic information intended for said mobile station.
2. A method for transmitting control information and user traffic signals according to claim 1, wherein said spread spectrum coding is orthogonal block encoding using scrambled Walsh-Hadamard codewords.
3. A method for transmitting control information and user traffic signals according to claim 1, wherein said calling channel signal is the largest signal in said composite signal.
4. A method for transmitting control information and user traffic signals according to claim 1, wherein specific relative phase of each of the signals within said composite signal alternate 90° when ordered according to signal strength.
5. A method for transmitting control information and user traffic signals according to claim 1, wherein said modulation is by quadrature phase shift keying.
6. A method for transmitting control information and user traffic signals according to claim 1, in which said modulation is by offset quadrature phase shift keying.
7. A method for transmitting control information and user traffic signals according to claim 1, in which said modulation is by quadrature amplitude modulation.
8. A method for transmitting control information and user traffic signals according to claim 1, in which said modulation is by offset quadrature amplitude modulation.
9. A method for transmitting control information and user traffic signals according to claim 1, wherein said decoding of said radio frequency signal in said mobile station is carried out using a fast Walsh transform computer.
10. A method for transmitting control information and user traffic signals according to claim 1, wherein said decoded control signal is extracted from the radio frequency signal prior to decoding traffic information.
11. A method for transmitting control information and user traffic signals according to claim 1, wherein said control information includes information about surrounding base stations.

12. A method for transmitting control information and user traffic signals according to claim 1, wherein said control information carries information for a specific group of mobile stations only at predetermined times.

13. A method for transmitting control information and user traffic signals according to claim 12, wherein said predetermined times depend upon a mobile identification number for each of said mobile stations.

14. A method for transmitting control information and user traffic signals according to claim 12, wherein said mobile stations reduces processing to conserve power at times other than said predetermined times.

15. A method for transmitting control information and user traffic signals according to claim 1, wherein said decoding of said radio frequency signal in said mobile station is performed by a non-coherent RAKE receiver.

16. A method for transmitting control information and user traffic signals according to claim 1, wherein said decoding of said radio frequency signals in said mobile station is performed by a coherent RAKE receiver.

17. A method for transmitting control information and user traffic signals according to claim 16, wherein coefficients for RAKE tap weighting used during traffic signal decoding are derived from correlations calculated during calling channel decoding.

18. A method for transmitting control information and user traffic signals according to claim 1, wherein said mobile stations receive more than one base station signal on the same frequency.

19. A method for transmitting control information and user traffic signals according to claim 18, wherein said mobile stations process calling channel signals for more than one base station.

20. A method for transmitting control information and user traffic signals according to claim 18, wherein said mobile stations process traffic signals for more than one base station.

21. A method for transmitting control information and user traffic signals according to claim 19, wherein said mobile stations use relative calling channel signal strengths determined by decoding different base station signals to ascertain the best base station to communicate with.

22. A method for transmitting control information and user traffic signals according to claim 18, wherein each of said mobile stations reports signal strengths determined by decoding different base station signals to a base station transmitting traffic for that mobile station.

23. A method for transmitting control information and user traffic signals according to claim 22, wherein a base station is selected to transmit traffic to said mobile station based upon said reports of signal strength.
- 5 24. An apparatus for transmitting control information and user traffic signals from a first base station to a plurality of mobile stations in a code division multiple access communication system, comprising:
- 10 first coding means for coding control information using a spread spectrum code unique to control information to form a calling channel signal;
- a second coding means for coding each user traffic signal using a spread spectrum code unique to each traffic signal;
- 15 summation means for adding said calling channel signal and said coded traffic signal using predetermined weighting factors to obtain a composite signal;
- modulation means for modulating said composite signal on a radio frequency carrier to form a radio frequency signal;
- 20 transmitting means for transmitting said radio frequency signal to said plurality of said mobile stations;
- receiving means for receiving said radio frequency signal at at least one of said mobile stations;
- decoding means for decoding said received signal at said mobile station to extract said control information, wherein said control information is used by
- 30 said mobile station to determine if said mobile station is being called and to determine a phase of the calling channel signal; and
- second decoding means for decoding said radio frequency signal in said mobile station using said phase of the calling channel signal to extract traffic information intended for said mobile station.
- 35 25. An apparatus according to claim 24, wherein said second decoding means includes extraction of a control signal from said radio frequency signal prior to decoding of traffic information.
- 40 26. An apparatus according to claim 24, wherein said second decoding means uses a non-coherent RAKE receiver.
27. An apparatus according to claim 24, wherein said
- 45 second decoding means uses a coherent RAKE receiver.
28. An apparatus according to claim 27, wherein coefficients for RAKE tap weighting used during traffic signal decoding are derived from correlations calculated during calling channel decoding.
- 50

55

60

65



#3

Patent
Attorney's Docket No. 027540-688**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Reissue Application of)	
)	
U.S. Patent No. 5,377,183 to)	Group Art Unit: Unassigned
)	
Paul W. DENT)	Examiner: Unassigned
)	
Serial No. Unassigned)	
)	
Filed: December 26, 1996)	
)	
For: CALLING CHANNEL IN)	
CDMA COMMUNICATIONS)	
SYSTEM)	

DECLARATION IN SUPPORT OF REISSUE APPLICATIONHonorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

I, Paul W. Dent, hereby declare as follows:

- (1) I am a citizen of the United Kingdom and reside at 637 Eagle Point Road, Pittsboro, North Carolina 27312.
- (2) I believe that I am the original, first inventor of the invention described and claimed in the United States Patent No. 5,377,183 and in the specification and the claims of the Reissue Application filed December 26, 1996.
- (3) I have reviewed and understand the contents of the specification and the claims of the Reissue Application.

(4) I acknowledge the duty to disclose information that I am aware of which is material to the examination of this Reissue Application in accordance with 37 C.F.R. § 1.56(a).

(5) I verily believe U.S. Patent No. 5,377,183 (hereinafter the '183 patent) to be partially inoperative by reason of having claimed less than I had the right to claim in said Letters Patent and, more particularly, by having omitted claims of the scope of new claims 29-36.

(6) New claim 29 is similar to claim 1 except for the addition of the phrase "wherein said control information carries information for a specified group of mobile stations only at predetermined times" at lines 6 and 7 (line numbers used herein refer to those used in the reissue application rather than the '183 patent), deletion of the phrase "using predetermined weighting factors" from line 10, changing the misspelled "carder" to "carrier" at line 12, deletion of "wherein said control information is used by said mobile station to determine if said mobile station is being called and to determine if said mobile is being called and to determine a phase of the calling channel signals" from lines 16-17, and deletion of the phrase "using said phase of the calling channel signal" from line 18. This new claim is provided to correct the error that a claim of this scope was not presented in the original application and, thus, the assignee and inventor claimed less than they had the right to claim.

(7) This error was recognized during a review of the '183 patent's claim coverage on or about September 1995.

(8) Specifically, it was noted during this review that originally filed claim 12 had not been rejected over any alleged prior art, but that an independent claim of the same or similar scope was not pursued.

(9) New claim 30 is not analogous to any of the patented claims, but instead seeks broader claim coverage for the invention claimed in, for example, claim 12 of the '183 patent. This invention relates to the power saving mode described, for example, at column 6, lines 19 *et. seq.*

(10) Claim 30 has been presented to correct the error that a claim of this scope was not presented in the original application and, thus, the assignee and the inventor claimed less than they had a right to claim.

(11) This error was also identified as set forth in paragraphs (7) and (8).

(12) New claims 31 and 32 depend from claim 30 and are also not analogous to any of the claims of the '183 patent.

(13) These claims relate to additional features of the power saving mode which were identified as a result of a review of the '183 patent's specification in conjunction with the claim scope review noted in paragraph (7).

(14) New claim 33 corresponds to claim 24 of the '183 patent, but differs in substantially the same ways that new claim 29 differs from claim 1 of the '183 patent as described in paragraph (6).

(15) This new claim is also provided to correct the error that a claim of this scope was not presented in the original application and, thus, the assignee and inventor claimed less than they had the right to claim.

(16) This error was also identified as described in paragraphs (7) and (8).


(17) New claims 34-36 correspond to new claims 30-32, respectively, in the sense that the identification of errors and how those errors were identified set forth in paragraphs (10)-(13) apply equally to these claims.

(18) Each of the foregoing errors arose without any deceptive intention on the part of the undersigned.

(19) Each of the foregoing errors is attributable to a failure on the part of the individuals who drafted and prosecuted the original application to appreciate the full scope of the invention.

(20) The undersigned declare further that all statements made herein are of our own knowledge and are true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

DATE: 10 FEB '97



Paul W. Dent



#3

Patent
Attorney's Docket No. 027540-688

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Reissue Application of)	
)	
U.S. Patent No. 5,377,183 to)	Group Art Unit: Unassigned
)	
Paul W. DENT)	Examiner: Unassigned
)	
Serial No. Unassigned)	
)	
Filed: December 26, 1996)	
)	
For: CALLING CHANNEL IN)	
CDMA COMMUNICATIONS)	
SYSTEM)	

**OFFER TO SURRENDER, ASSENT OF ASSIGNEE,
AND POWER OF ATTORNEY**

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Ericsson Inc. a corporation duly organized under the laws of Delaware and having a place of business at 7001 Development Drive, Post Office Box 13969, Research Triangle Park, North Carolina 27709 is owner, by assignment, of the entire title to United States Letters Patent No. 5,377,183 granted on December 27, 1994.

Ericsson Inc. hereby offers to surrender said Letters Patent and assents to the application for reissue of said Letters Patent filed herewith.

Ericsson Inc. hereby appoints Ronald L. Grudziecki, Reg. No. 24,970, Michael G. Savage, Reg. No. 32,596 and Steven M. du Bois, Reg. No. 35,023 and the firm of Burns, Doane, Swecker & Mathis, L.L.P. its attorney with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, all correspondence should be addressed to Burns, Doane, Swecker & Mathis, Washington & Prince Streets, P.O. Box 1404, Alexandria, Virginia 22313-1404.

ERICSSON INC.

By: Charles L. Moore

Name: Charles L. Moore, Esquire

Title: Associate General Patent Counsel,
and Assistant Secretary

Date: FEB. 6, 1997

MAR 18 1998

3
Patent
Attorney's Docket No. 040010-052

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Reissue Application of)
U.S. Patent No. 5,377,183 to)
Paul W. DENT)
Application No.: 08/999,604) Group Art Unit: 2732
Filed: December 26, 1996) Examiner: UNASSIGNED
For: CALLING CHANNEL IN A)
CDMA COMMUNICATIONS SYSTEM)

STATEMENT UNDER 37 C.F.R. § 3.73(b) AND
SUBMISSION OF DOCUMENTS SHOWING NAME CHANGE

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Ericsson, Inc., a corporation duly organized under the laws of Delaware and having a place of business at 7001 Development Drive, Post Office Box 13969, Research Triangle Park, North Carolina, 27709, is owner, by Assignment of the entire title to United States Letter Patent No. 5,377,183 granted on December 27, 1994. The Assignment was recorded in the Patent and Trademark Office at Reel 6175, Frame 0222.

The recorded Assignment indicates that "Ericsson GE Mobile Communications, Inc." is the Assignee. Attached are documents indicating that the name of the Assignee has been changed from "Ericsson GE Mobile Communications Inc." to "Ericsson Inc."

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

By: Jennifer P. Wright

Jennifer P. Wright
Registration No. 41, 385

P.O. Box 1404
Alexandria, Virginia 22313-1404
(919) 941-9240

Date: March 19, 1998

COURTESY COPY

Patent
Attorney's Docket No. 027540-688

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Reissue Application of)

U.S. Patent No. 5,377,183 to)

Paul W. DENT)

Serial No. Unassigned)

Filed: December 26, 1996)

For: CALLING CHANNEL IN)
CDMA COMMUNICATIONS)
SYSTEM)

Group Art Unit: Unassigned

Examiner: Unassigned

Received
FEB 15 1998
Group 2700

SUBMISSION OF OFFER TO SURRENDER, ASSENT OF ASSIGNEE,
AND POWER OF ATTORNEY, AND
DECLARATION IN SUPPORT OF REISSUE APPLICATION

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Enclosed please find an Offer to Surrender, Assent of Assignee and Power of Attorney executed by the appropriate official of Ericsson Inc., as well as an inventor-executed Declaration in Support of Reissue Application in connection with the subject application.

The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in triplicate.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.


NITSHILL
2/28/97


By: Steven M. du Bois
Steven M. du Bois
Registration No. 35,023


P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620


Date: February 26, 1997


DOCKETED
2/26/97
E/CAW

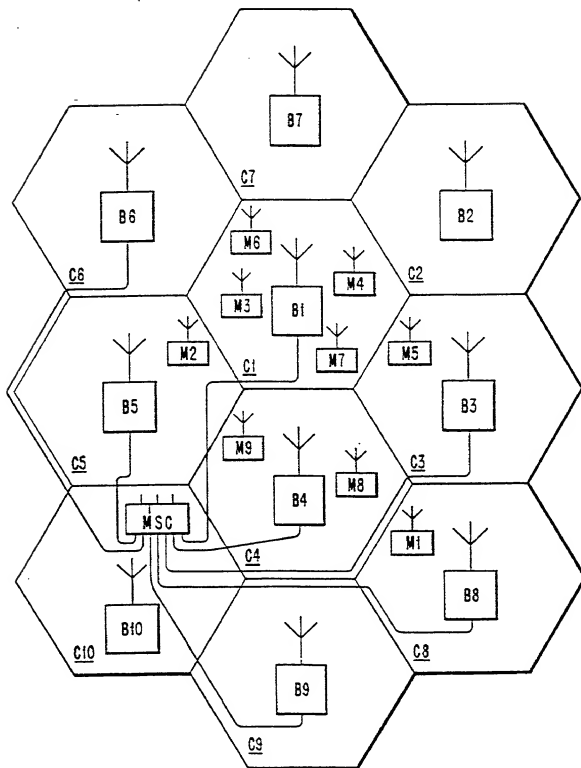Fig. 1

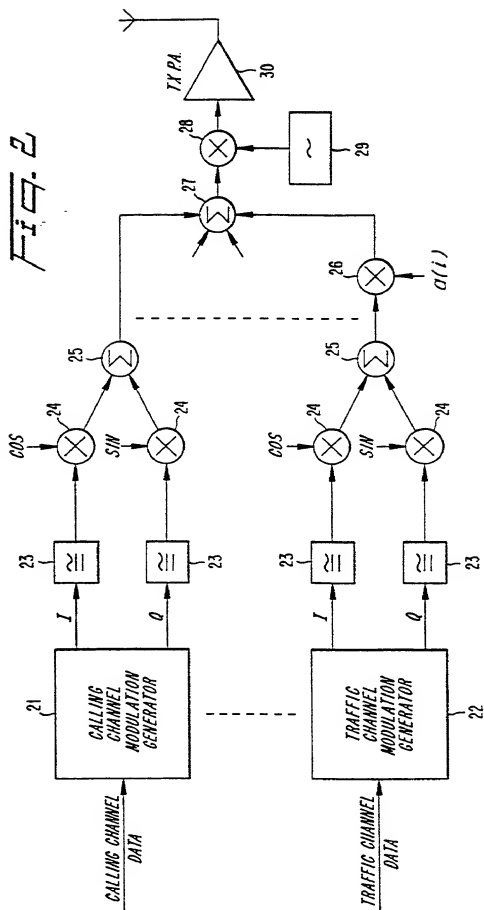

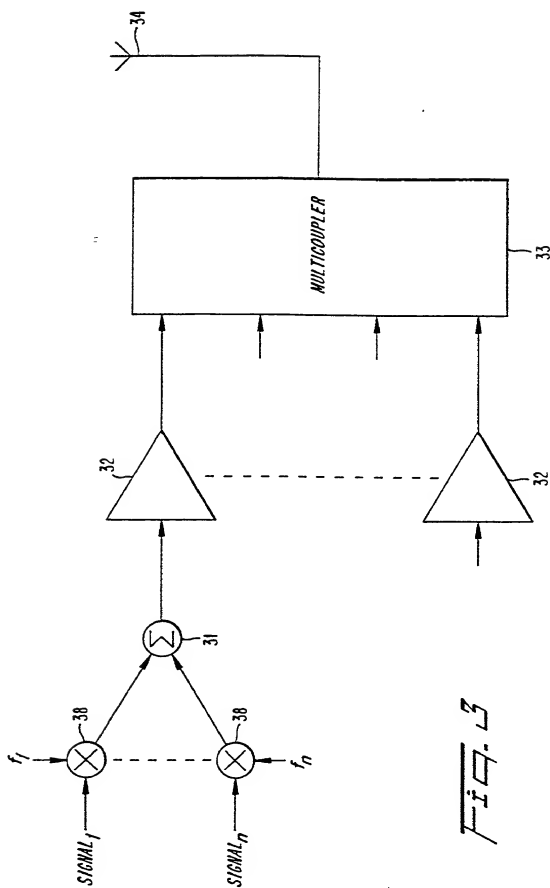

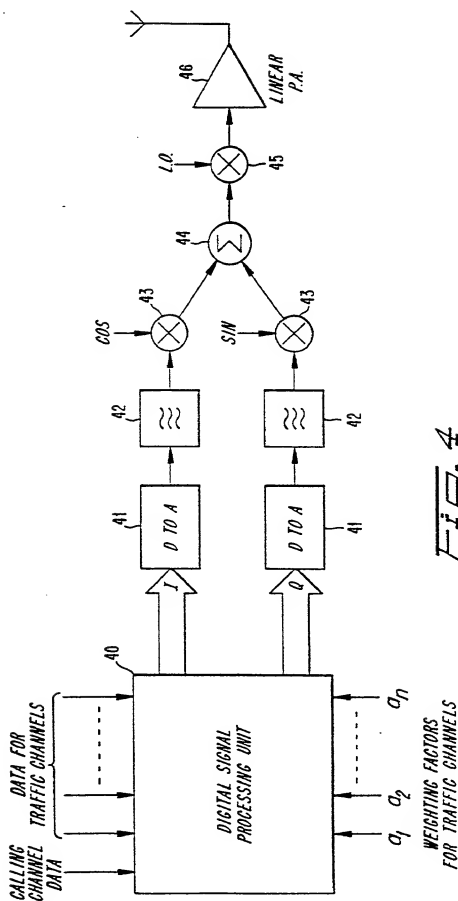

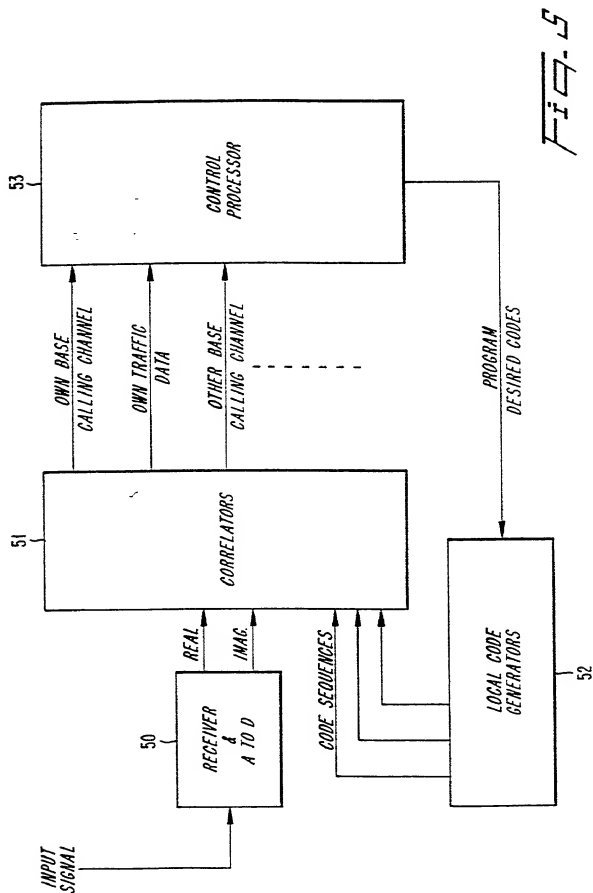

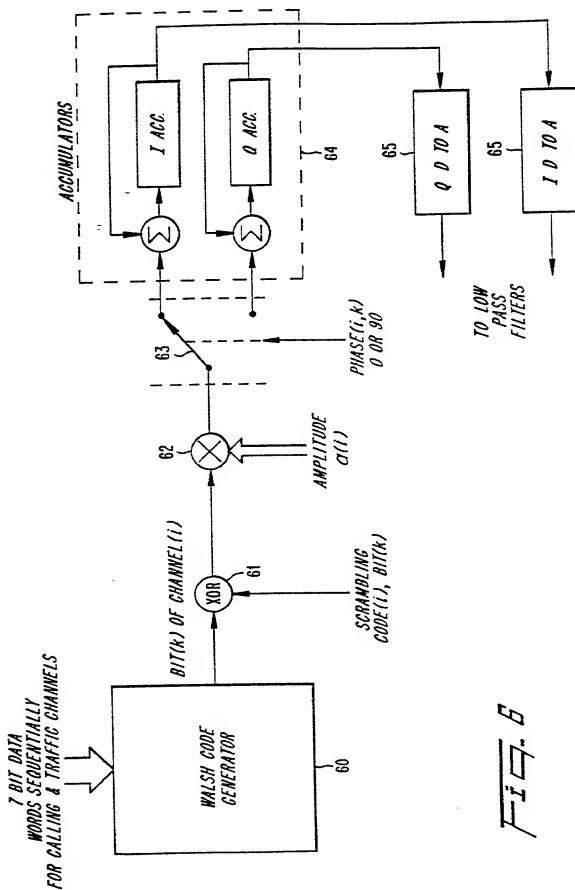


Fig. 6

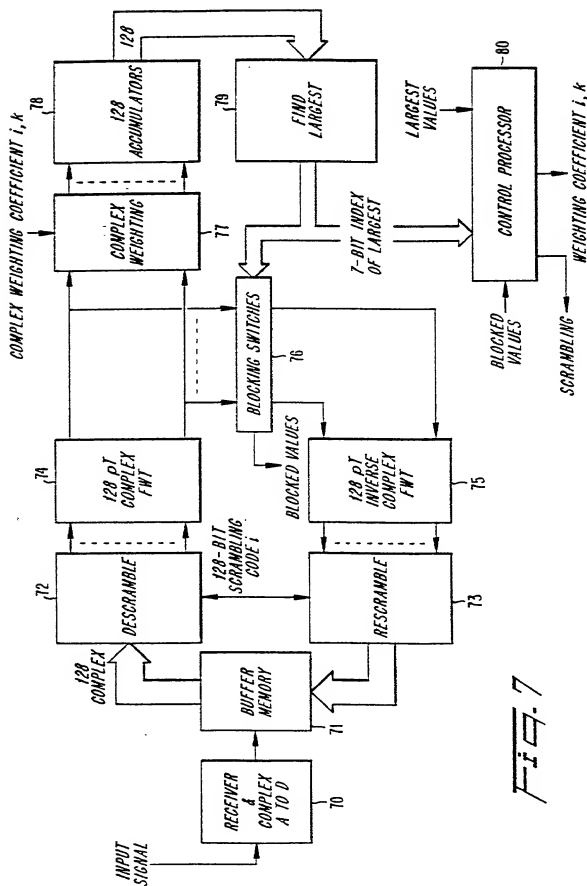


Fig. 7